


CBB20 Axial-type metallized polypropylene film capacitor

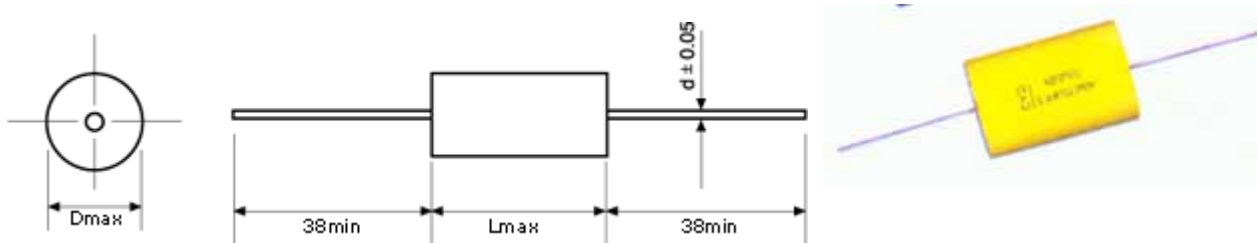

Features:
 Non-inductive construction, Down-leads axially and horizontally
 Very low loss at high frequency, suitable for high current
 High insulation resistance, long life due to self-healing effect
 Widely used in high frequency, DC, AC and pulse circuits

Reference Standard	GB10190-88(IEC60384-16)	
Climatic Category	40/85/21	
Rated Voltage	160/250V、400V、1000V、1200V	
Capacitance Range	0.010~30μF	
Capacitance Tolerance	±5%(J), ±10%(K), ±20%(M)	
Voltage proof	1.6UR(5s)	
Dissipation Factor	0.1%(20 , 1KHz)	
Insulation Resistance	25000MΩ(CR ≤ 0.33μF)	(20 , 1min)
	7500s(CR > 0.33μF)	

Cap. (uF)	160/250VDC		400VDC		630VDC	
	Dmax	Lmax	Dmax	Lmax	Dmax	Lmax
0.001					5	13
0.0015					5	13
0.0022					5	13
0.0033					5	13
0.0047					5	13
0.0068			5	13	6	16.5
0.01	5	13	6	16.5	6.5	16.5
0.015	5	13	6	16.5	7.5	16.5
0.022	6	16.5	6.5	16.5	8.5	16.5
0.033	6	16.5	7	16.5	8.5	20.5
0.047	6.5	16.5	8	16.5	9.5	20.5
0.068	7.5	16.5	8	20.5	9	28
0.1	8.5	16.5	9	20.5	10	28
0.15	8.5	20.5	8.5	28	12	28
0.22	9.5	20.5	10	28	13	33
0.33	9	28	11.5	28	15.5	33
0.47	10.5	28	13	28	18	33
0.68	12	28	14.5	33	21	33
1	13	33	17	33		
1.5	15.5	33	20	33		
2.2	18	33				
3.3	21.5	33				