

# ET3386 Cermet Trimming Potentiometer

**ELECSOUND®**

## Features:

Square 9MM/ Multiturn/ Cermet/ Industrial/ Sealed  
 Many Terminal Styles  
 Rohs Compliant


## Electrical Characteristics

Standard Resistance Range: 10Ω - 2MΩ  
 Resistance Tolerance: ±10% std.  
 Absolute Minimum Resistance: ≤1% or 2Ω  
 Contact Resistance Variation: ≤3% or 3Ω  
 Insulation Resistance : R1≥1,000 MegΩ  
 Withstand Voltage : 600VAC  
 Effective Travel: 300° normal

## Environmental Characteristics

Power Rating:(315V max)0.5W@70°C,0W@125°C  
 Temperature Range: -55°C to +125°C  
 Temperature Coefficient: ±100ppm/°C  
 Vibration:10-500Hz,0.75mm,6Hour:ΔR≤±5%  
 Shock: 390m/s, 4000cycles, ΔR≤±5%  
 Endurance:0.5W@70°C,1000H,ΔR≤10%  
 Rotational Life: 200Cycles,ΔR≤±5%

## How to order:

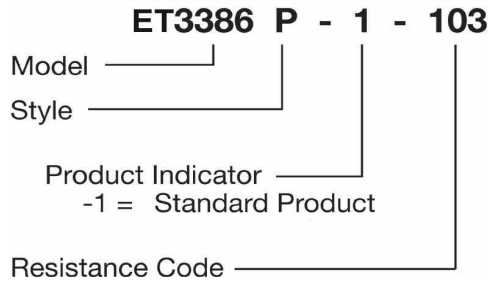


## Standard Resistance Table:


Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1000	102
2000	202
5000	502
10000	103
20000	203
25000	253
50000	503
100000	104
200000	204
250000	254
500000	504
1000000	105
2000000	205

## Physical Characteristics


Starting Torque: ≤35mN·m  
 Flammability: UL-94V-0  
 Marking: Resistance code, Model  
 Standard Packaging: 50pcs per tube




### Common Dimensions Side Adjust Models B,C,J,X

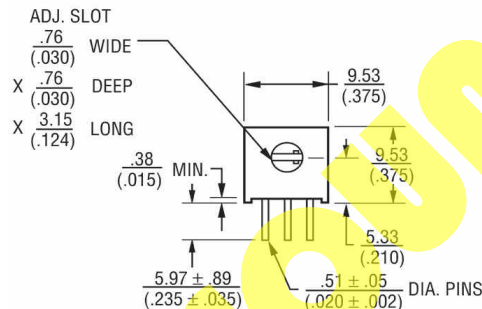


### 3386B




### 3386C




### 3386J




### 3386X




### Common Dimensions Side Adjust Models H,S,W

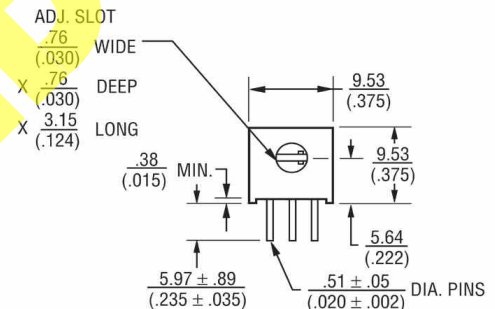



### 3386H



### 3386S



### 3386W

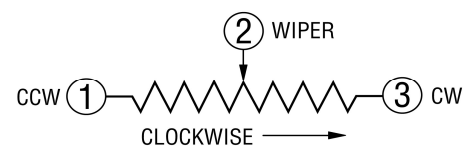










**Elecsound Electronics Company Limited** Copyright©2009

TEL: 86-0755-83045964 FAX: 86-0755-82948027




website: [www.elecsound.com.cn](http://www.elecsound.com.cn)

[sales@elecsound.com.cn](mailto:sales@elecsound.com.cn)



## Common Dimensions Top Adjust Models F,G,K,P,R,U,V,Y

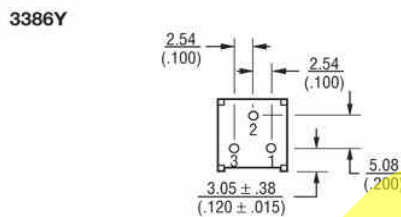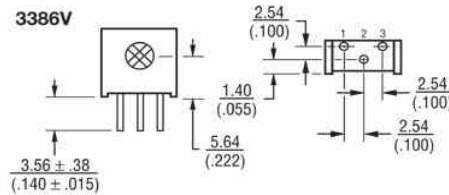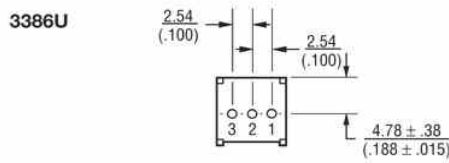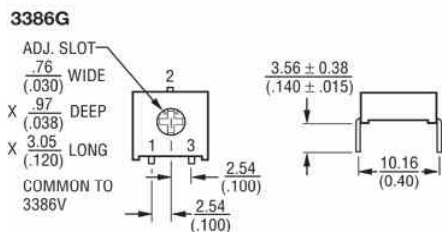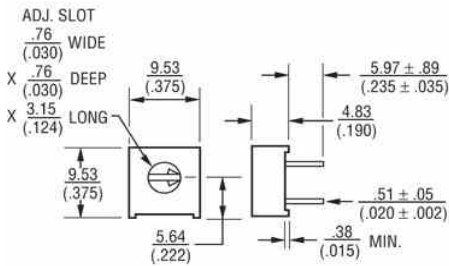



## Common Dimensions Top Adjust Models M, T

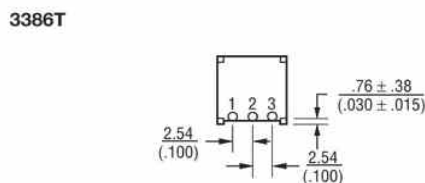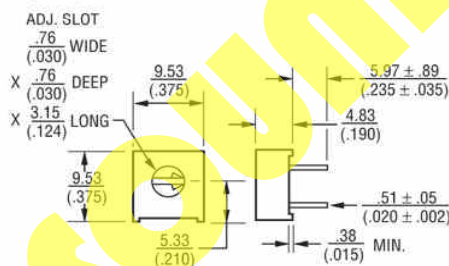

## 3386H-EY5 3386X-EY5 - SHOWN

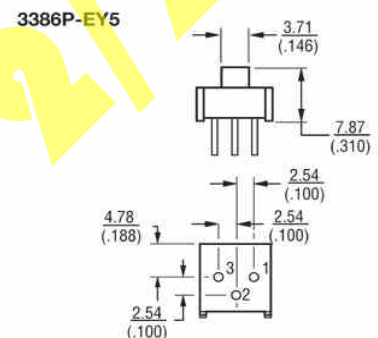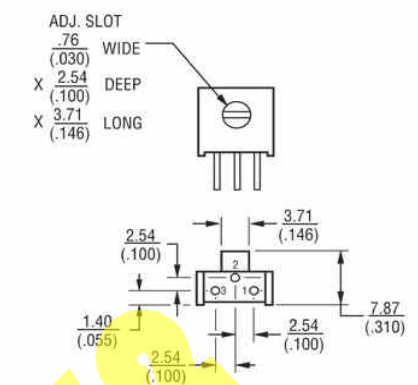

The Model 3386 is available with a knob for finger adjustment. Add suffix letter "T" to order code for F, P and X terminal styles.

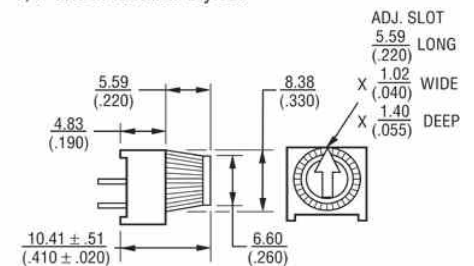

TOLERANCES: ± 0.25 (.010) EXCEPT WHERE NOTED

DIMENSIONS ARE:  $\frac{\text{MM}}{\text{(INCHES)}}$